Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 107393

LIGITEK

ROUND TYPE LED LAMPS **LX3330** SERIES

Package Dimension

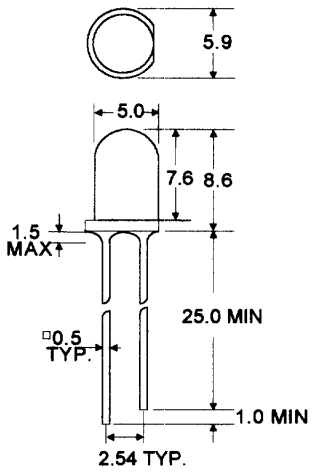

Note: All dimension are in millimeter tolerance is ±0.25mm unless otherwise noted.

Radiation

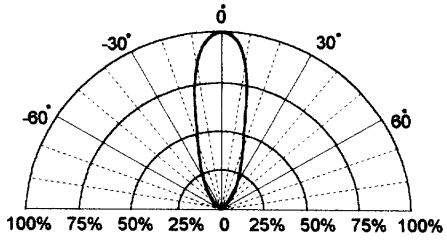

- **Part Selection And Application Information (Ratings At 25°C Ambient)**

PART NO	MATERIAL	COLOR		peak wave length λPnm	spectral halfwidth Δλ nm	forward voltage @20mA(v)		luminous intensity @10mA(mcd)		viewing angle 2θ 1/2 (deg)
		Emitted	*Len's*			*Min*	*Max*	*Min*	*Typ.*	
LR3330	GaAsP	Red	Red Diffused	655	40	1.5	2.0	0.9	1.5	36
LH3330	GaP	Red	Red Diffused	697	90	1.7	2.8	1.8	3.0	36
LG3330	GaP	Green	Green Diffused	565	30	1.7	2.8	7.2	12	36
LY3330	GaAsP/GaP	Yellow	Yellow Diffused	585	35	1.7	2.8	7.2	12	36
LE3330	GaAsP/GaP	Orange	Orange Diffused	635	45	1.7	2.8	7.2	12	36
LA3330	GaAsP/GaP	Yellow	Orange Diffused	600	35	1.7	2.8	7.2	12	36

- **Absolute Maximum Rating (Ta=25°C)**

PARAMETER	RED		GREEN	YELLOW		ORANGE	UNIT	REMARK
	R	*H*	*G*	*Y*	*A*	*E*		
Forward Current	40	15	30	20	20	30	mA	
Peak Current Duty 1/10 @1Khz	200	60	120	80	80	120	mA	
Power Dissipation	80	40	100	60		100	mW	
Reverse Current @5V	10		10	10		10	μA	
Operating Temperature	-40°C TO +85°C							
Storage Temperature	-40°C TO +100°C							
Lead Soldering Temperature 260°C For 5 Seconds (2.0mm From Body)								

文件編號:QW0905-LX3330B 版本:B 生效日期: Dec . 25 . 1996